
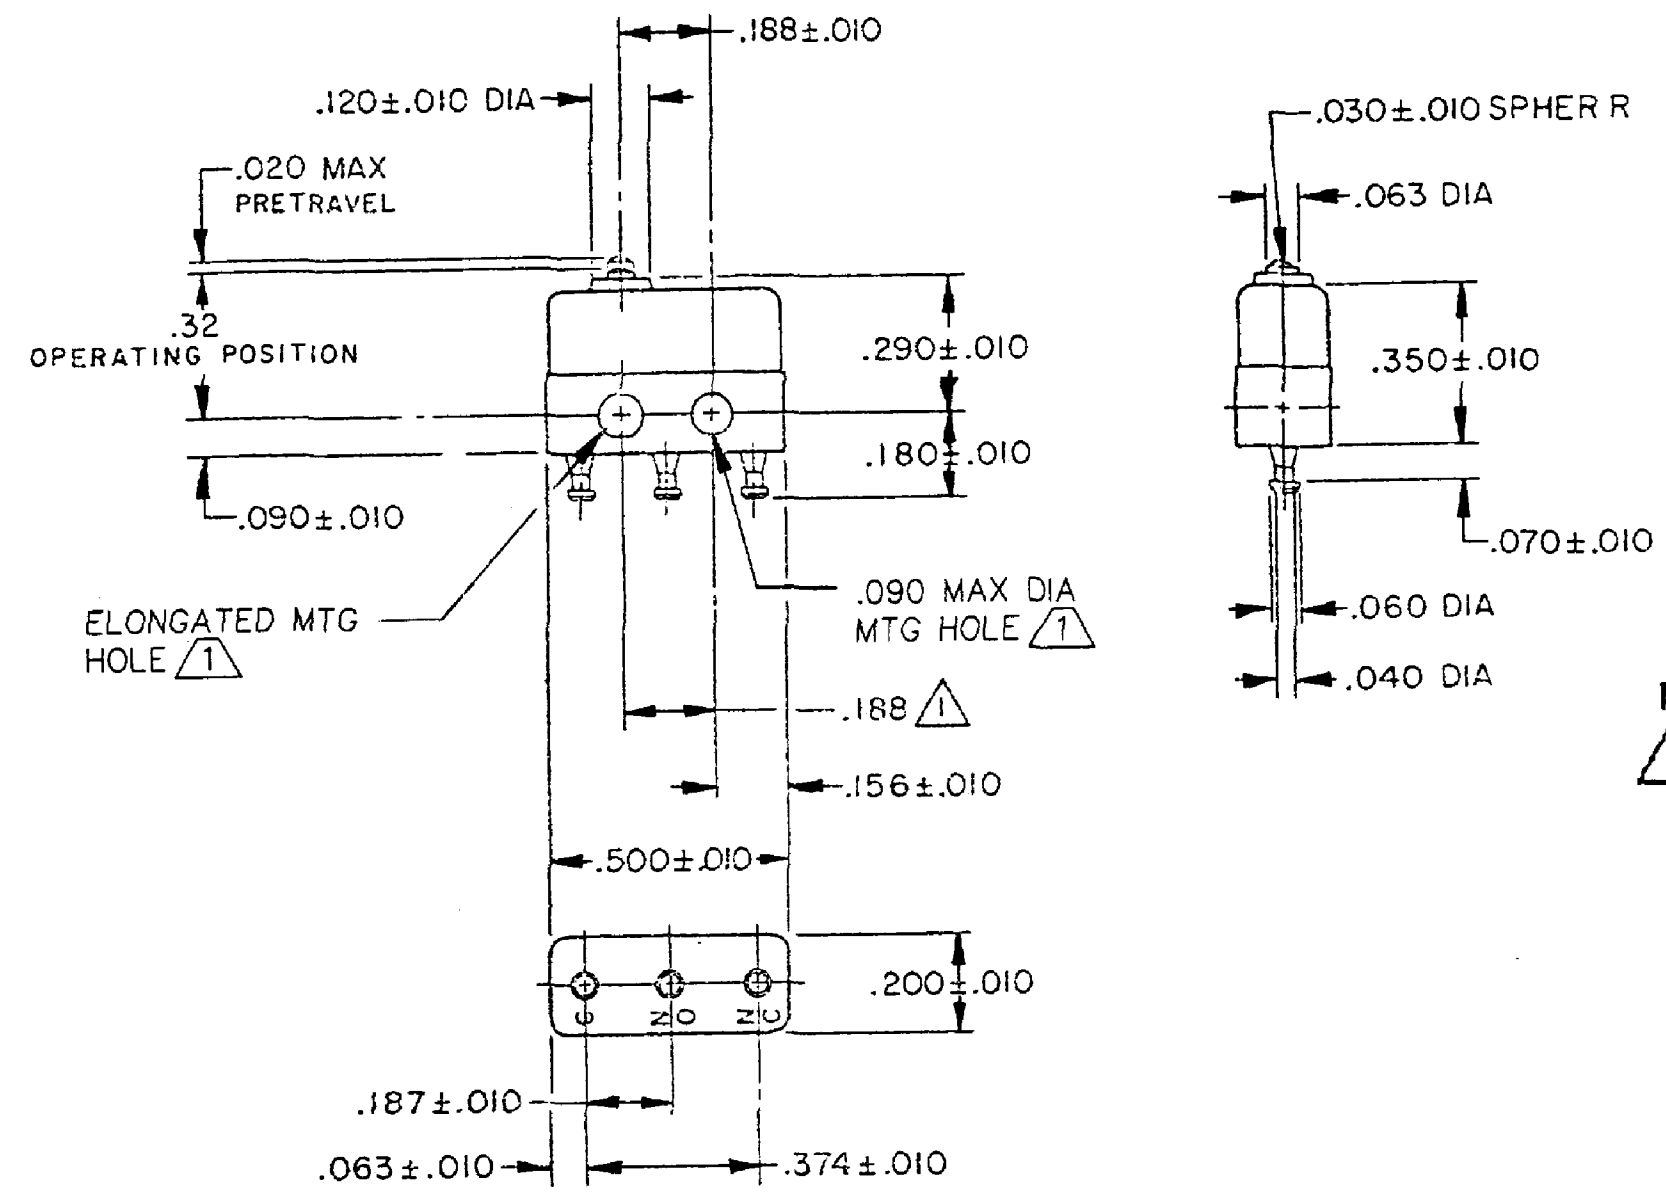


HONEYWELL  
PART NUMBER  
11SX1-T  
PRODUCT CODE  
VDJ1000

REV	DOCUMENT	CHANGED BY	CHECK
9	0038448	VS 28APR08	BLR

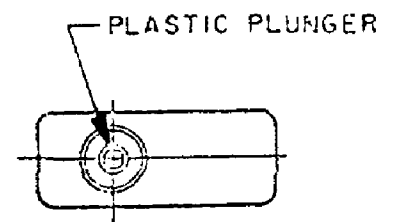

**NOTES**  
 (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR-298
REPLACES	

CHARACTERISTICS	
OPERATING FORCE	- - - - 3.5 OZ MAX
RELEASE FORCE	- - - - .75 OZ MIN
DIFFERENTIAL TRAVEL	- - - .001 MAX
OVERTRAVEL	- - - - .004 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
28 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	2 AMP	-
RESISTIVE	3 AMP	-
APPROVALS		
KEMA, CE	3A 250V~ T125 5E4	CE
UL, CSA	3A 250 VAC	UL BRAND L122A

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	08FEB08
CHECK	RJ	08FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE <b>SWITCH - BASIC</b>			
SIZE	TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>11SX1-T</b>	<b>9</b>
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1