
Page 1 of 3 Part Curves


teward

Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

28A0350-0B2












Figure 2









-0A0 = White Plastic Snap On Case -0A2 = Black Plastic Snap On Case Part Curves Page 2 of 3

Drawing Figure


Figure
Number
2

Electrical Characteristics

Z @	Z @	Z @		
25 MHZ	100 MHz	300 MHz		
100	240	400		

Physical Dimensions

Case A mm	Case A1 mm	Case B mm	Case C mm	Case C1 mm	Case D mm	Case E mm	Maximum Cable Diameter mm	Maximum Cable Diameter inches
13.00	-	3.50	25.20	-	11.50	20.00	3.50	0.138

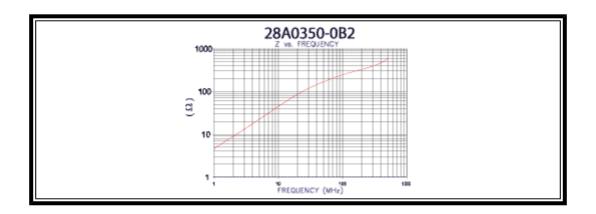

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

Part Curves Page 3 of 3

america s@s teward.com mexico@steward.com europe@s teward.com asia @steward.com

Copyright© 2004 Steward, Inc.

Last Updated: 2/12/2004