


## Female Crimp Trio-Tek

- Crimp inspection window in housing.
- Mates with male connectors shown on pages 52 to 64.
- Contacts available separately, see page 51.
- Triangular contact design for automated assembly equipment.
- Ideal for volume applications.

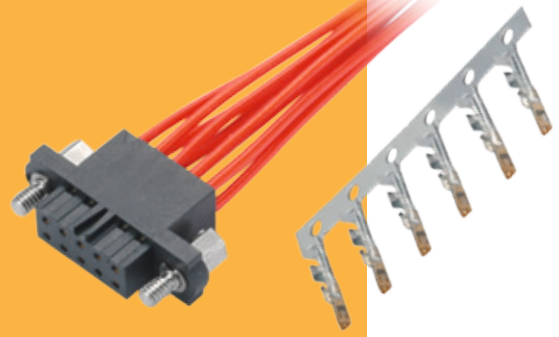

DATAMATE J-TEK

WITH JACKSCREWS		CALCULATION																				
		<b>A</b>	B + 12																			
		<b>B</b>	Total no. of contacts - 2																			
		<b>C</b>	B + 7																			
<b>WITHOUT JACKSCREWS</b>		<b>TOOLS</b>																				
		<b>Recommended Hand Crimp Tool</b> - Z80-255 <b>Contact Removal Tool</b> - Z80-258 See pages 87 to 89 ➤ Instruction sheets available at <a href="http://www.harwin.com/downloads/instructions">www.harwin.com/downloads/instructions</a>																				
		<b>WIRE STRIPPING DETAILS</b>																				
<b>HOW TO ORDER</b>																						
<b>M80 - 45X XX 98</b>																						
<b>SERIES CODE</b>		<b>FINISH</b>																				
<table border="1"> <thead> <tr> <th colspan="4">TYPE</th> </tr> </thead> <tbody> <tr> <td><b>454</b></td> <td>Without Jackscrews</td> <td><b>457</b></td> <td>Reverse Fix Jackscrews</td> </tr> <tr> <td><b>455</b></td> <td>Hex Slotted Jackscrews</td> <td><b>458</b></td> <td>Guide pin with panel mount</td> </tr> <tr> <td><b>456</b></td> <td>Hex Socket Jackscrews</td> <td><b>459</b></td> <td>101Lok Jackscrews</td> </tr> </tbody> </table>		TYPE				<b>454</b>	Without Jackscrews	<b>457</b>	Reverse Fix Jackscrews	<b>455</b>	Hex Slotted Jackscrews	<b>458</b>	Guide pin with panel mount	<b>456</b>	Hex Socket Jackscrews	<b>459</b>	101Lok Jackscrews	<table border="1"> <tbody> <tr> <td><b>98</b></td> <td>Housings</td> <td></td> </tr> </tbody> </table>		<b>98</b>	Housings	
TYPE																						
<b>454</b>	Without Jackscrews	<b>457</b>	Reverse Fix Jackscrews																			
<b>455</b>	Hex Slotted Jackscrews	<b>458</b>	Guide pin with panel mount																			
<b>456</b>	Hex Socket Jackscrews	<b>459</b>	101Lok Jackscrews																			
<b>98</b>	Housings																					
		<b>TOTAL NO. OF CONTACTS</b>																				
		<b>06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>																				

All dimensions in mm.