


1 2 3 4 5 6 7

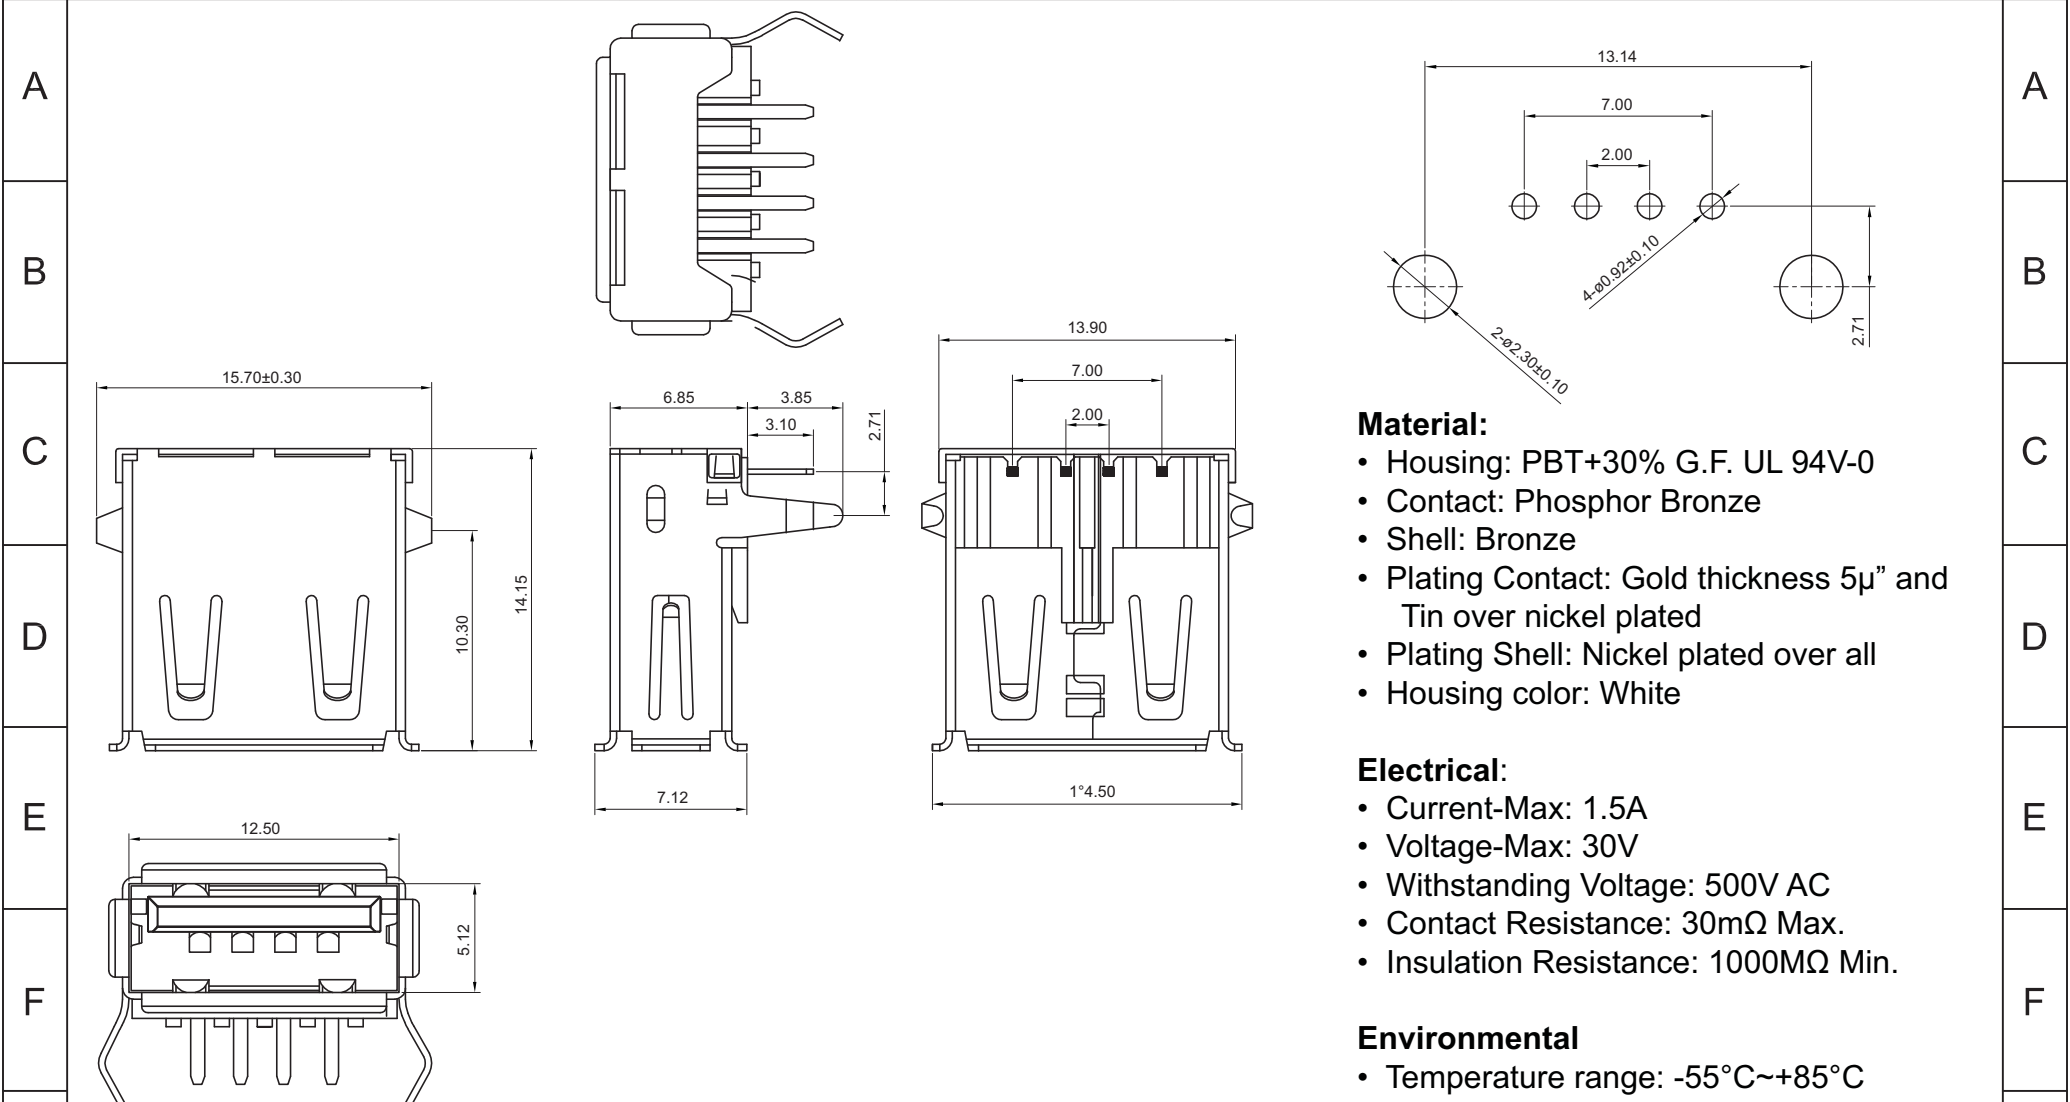

Material:

- Housing: PBT+30% G.F. UL 94V-0
- Contact: Phosphor Bronze
- Shell: Bronze
- Plating Contact: Gold thickness 5µ" and Tin over nickel plated
- Plating Shell: Nickel plated over all
- Housing color: White

Electrical:

- Current-Max: 1.5A
- Voltage-Max: 30V
- Withstanding Voltage: 500V AC
- Contact Resistance: 30mΩ Max.
- Insulation Resistance: 1000MΩ Min.

Environmental

- Temperature range: -55°C~+85°C

Unit: mm



Scale	1:1						Date	Name	Title	
TOLERANCE							Drawn	30.11.12	Wilson	USB 1.1 A/F DIP 90° Connector for PCB Mount, 5µ" Gold, White
X.X	±0.38						Approved	30.11.12	Groll	ASSMANN WSW-No.
X.XX	±0.25									AU-Y1005-R
X.XXX	±0.13									Drawing-No.
X.X°	±3.0°									rev00
X.XX°	±1.0°	ⓐ								Replace
X.XXX°	±0.5°	Id.	Modification	Date	Name					Sheet
										1/1
								1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		

1 2 3 4 5 6 7