



# Metal thin film chip resistors (Ultra-precision)

■ RG series (This series now includes the former RGH series.)

AEC-Q200 Compliant

## Features

- Ultimate chip resistors: the result of all of our thin film technology expertise including inorganic passivation
- Resistance drift: less than  $\pm 0.1\%$  after 10000 hour accelerated reliability test
- $\pm 0.02\%$  of resistance tolerance and  $\pm 5\text{ppm}/^\circ\text{C}$  of temperature coefficient of resistance
- Excellent tolerance to power surges

## Applications


- Any applications that require precision resistors such as automotive electronics, industrial test and measurement equipment, and consumer electronics

## Specifications

\* Standard stock item: E-24 series with TCR P, Q, and R grades, as well as tolerance D and B grades. Other E-24 grades and E-96 series are made to order

unit : mm

### Dimensions



Dimension (inch)	RG1005 (0402) OLD:RGH1005-2B included	RG1608 (0603) OLD:RGH1608-2C included	RG2012 (0805) OLD:RGH2012-2E included	RG3216 (1206)
L	1.00 $\pm$ 0.05	1.60 $\pm$ 0.20	2.00 $\pm$ 0.20	3.20 $\pm$ 0.20
W	0.50 $\pm$ 0.05	0.80 $\pm$ 0.20	1.25 $\pm$ 0.20	1.60 $\pm$ 0.20
A	0.20 $\pm$ 0.10	0.30 $\pm$ 0.20	0.40 $\pm$ 0.20	0.50 $\pm$ 0.25
B	0.25 $\pm$ 0.05	0.30 $\pm$ 0.20	0.40 $\pm$ 0.20	0.50 $\pm$ 0.20
T	0.35 $\pm$ 0.05	0.40 $\pm$ 0.10	0.40 $\pm$ 0.10	0.40 $\pm$ 0.10

**NOTE** Obsolete : RGH1005-2B (0402) RGH:1608-2C (0603) RGH2012-2E (0805)  
Alternative P/N : RG1005 (0402) RG1608 (0603) RG2012 (0805)

### Electrical characteristics

Series name		RG1005				RG1608					
Rated power*1	High power application	1/8W (OLD : RGH1005-2B)				1/6W (OLD : RGH1608-2C)					
	Regular power application	1/16W				1/10W					
	High precision	1/32W				1/16W					
E series offered		E-24, E-96									
Resistance range (Ω)		10 ~ 46.4	47 ~ 97.6	100 ~ 2.94k	3k ~ 100k	10 ~ 46.4	47 ~ 97.6	100 ~ 4.99k	5.1k ~ 270k	274 ~ 332k	340 ~ 360k
Resistance tolerance (%)	±0.02% (P)	—	—	○	—	—	—	○	—	—	—
	±0.05% (W)	—	○	○	○	—	○	○	○	—	—
	±0.1% (B)	—	○	○	○	—	○	○	○	○	—
	±0.25% (C)	—	○	○	○	—	○	○	○	○	—
	±0.5% (D)	○	○	○	○	○	○	○	○	○	○
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	○	—	—	—	○	—	—	—
	±10 (N)	—	○	○	○	—	○	○	○	—	—
	±25 (P)	—	○	○	○	—	○	○	○	○	○
	±50 (Q)	—	—	—	—	○	—	—	—	—	—
	±100 (R)	○	—	—	—	—	—	—	—	—	—
Maximum voltage		50V				100V					
Operating temperature		-55℃ ~ 155℃				-55℃ ~ 155℃					
Packaging	5,000pcs	CodeT5				CodeT5					
	10,000pcs	CodeT10				—					

Series name		RG2012					RG3216			
Rated power*1	High power application	1/4W(OLD : RGH2012-2E)					—			
	Regular power application	1/8W					1/4W			
	High precision	1/10W					1/8W			
E series offered		E-24, E-96								
Resistance range (Ω)		10 ~ 46.4	47 ~ 97.6	100 ~ 10k	10.2k ~ 475k	487k ~ 1M	10 ~ 46.4	47 ~ 97.6	100 ~ 33.2k	34k ~ 1M
Resistance tolerance (%)	±0.02% (P)	—	—	○	—	—	—	—	○	—
	±0.05% (W)	—	○	○	○	—	—	○	○	○
	±0.1% (B)	—	○	○	○	○	—	○	○	○
	±0.25% (C)	—	○	○	○	○	—	○	○	○
	±0.5% (D)	○	○	○	○	○	○	○	○	○
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	○	—	—	—	—	○	—
	±10 (N)	—	○	○	○	—	—	○	○	○
	±25 (P)	—	○	○	○	○	—	○	○	○
	±50 (Q)	○	—	—	—	—	○	—	—	—
	Maximum voltage		150V					200V		
Operating temperature		-55℃ ~ 155℃					-55℃ ~ 155℃			
Packaging	5,000pcs	CodeT5					CodeT5			


\*1 Depending on customer's reliability requirements, power rating between high power and regular power can be selected.  
· Contact us for RG3225 with 1/2W rated power.

## Reliability characteristics


Item	Test Method	Specification: drift limits for each power rating						(Typical)
		Low		Regular		High		
		≤47Ω	≥47Ω	≤47Ω	≥47Ω	≤47Ω	≥47Ω	
Short time Overload	Applied voltage : 2.5 times. Test duration: 5 seconds. (When maximum operating voltage: 2 times or less)	±0.10%	±0.05%	±0.10%	±0.05%	—	±0.10%	±(0.01%)
Load Life	Test temperature : 85°C (When high voltage : 70°C ). Applied voltage : rated voltage. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.01%)
Moisture load life	Test condition: 85°C, 85% RH. Applied power : 1/10 rated power. Repeat 1000 hours as follow : 90 mins on/30mins off.	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.05%)
Temperature Cycle	Repeat 1000 cycle as follow : —55°C (30 min.)/Room Temp.(2 min.) / +125°C (30min.)/Room Temp.(2min.)	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
High temperature Exposure	+155°C for 1000 hours with no load	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)

## 10000 hour reliability test data


## Life test

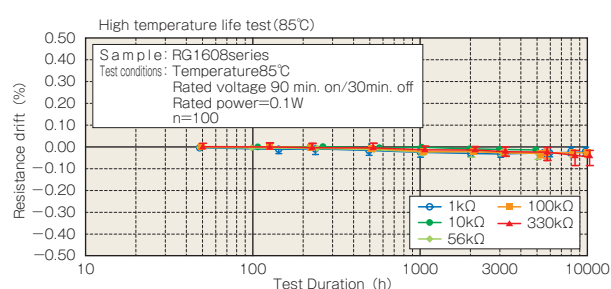


## High temperature high humidity bias test

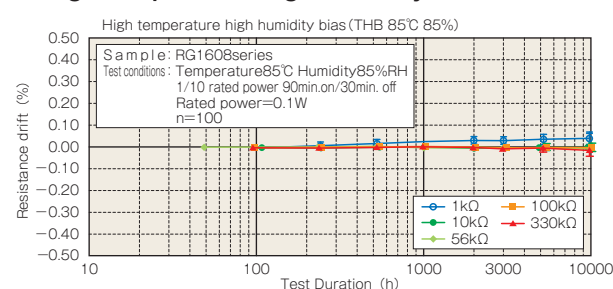


## Temperature cycle test

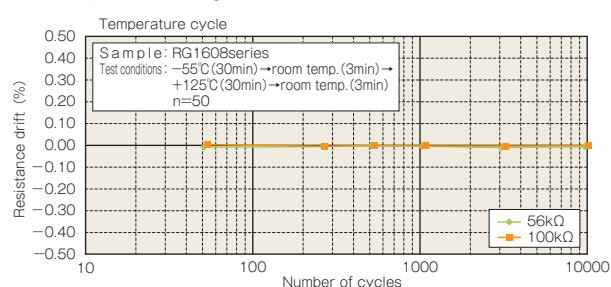


## High temperature exposure test

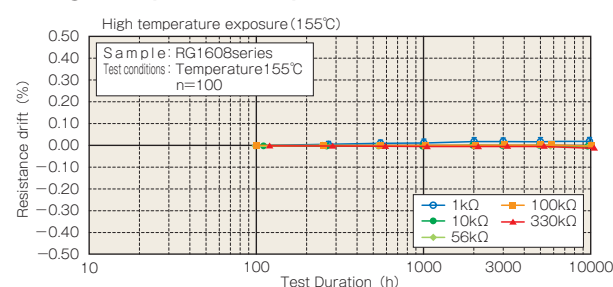

## Power derating characteristics

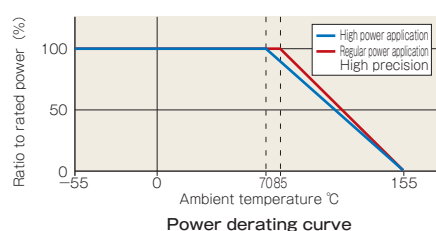

## Maximum pulse power limit

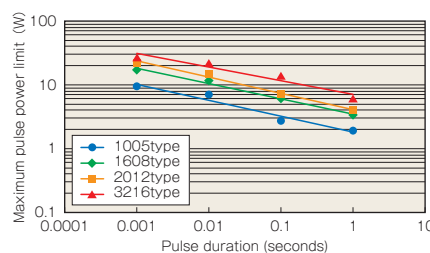

## Test procedure

Voltage pulse is applied to the test samples mounted on the test board.

After each pulse, resistance drift is measured. Pulse voltage is increased until the drift exceeds  $\pm 0.5\%$ . The power at that voltage is defined as the maximum pulse power.

## Part numbering system

