

# ENERGIZER CR1220

## Lithium Coin




### Industry Standard Dimensions

mm (inches)



This Battery has Underwriters Laboratories component Recognition

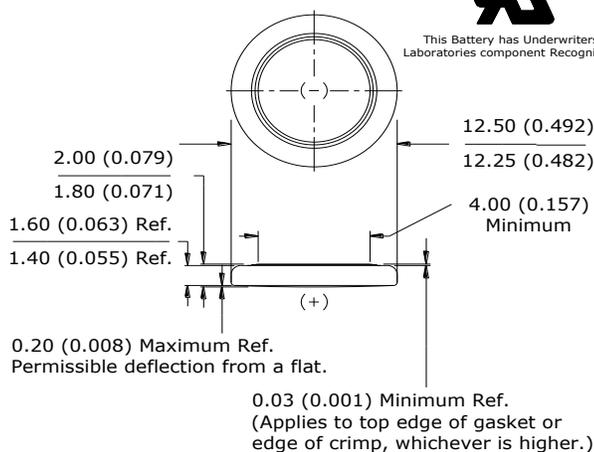

### Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.85V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.064	45,000	628

### Typical Discharge Characteristics

Load: 45K ohms - Continuous  
Typical Drain @ 2.9V: 0.064 mA




### Internal Resistance Characteristics

Pulse Test at 21°C (70°F)

**Bkgnd Drain:** Continuous  
62K ohms  
0.046 mA @2.85V

**Pulse Drain:** 2 seconds X 12 times/day  
1K ohms  
2.8 mA @2.65V

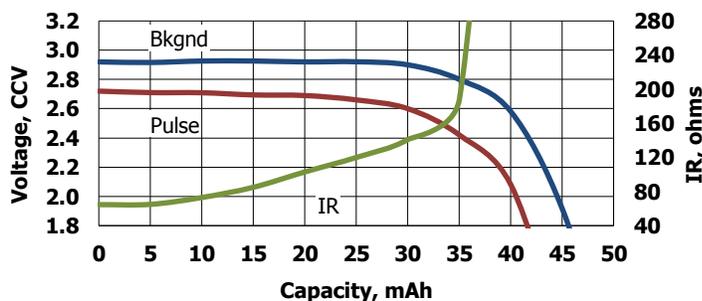

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.