

NEMA line Outlet 5-15R, Snap-in Mounting, Front Side, Solder Terminal



Snap-In Version

**Description**

- Panel Mount:
Snap-in, Front Side
- 1 Function:
Line Outlet, Protection class I
- Solder terminals

Approvals

- UL File Number: E96454
- CSA File Number: 73690

Characteristics

- Designed for standard applications
- Suitable for use in equipment according to IEC 60950

References

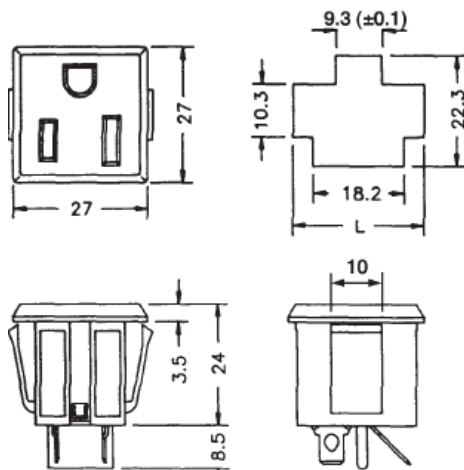
Alternative: protection class II version 0715

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)

Technical Data

Ratings UL/CSA	15 A / 125 VAC; 60 Hz
Allowable Operation Temp.	-25 °C to +60 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals
Panel Thickness s	Snap-in 0.8 mm to 1.6 mm
Material: Housing	Thermoplastic, black

Dimensions

Pannel thickness s	length L
0.8 mm	24.0 mm
1.2 mm	25.2 mm
1.6 mm	26.2 mm

Variants

Type	Protection Class	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
0709	I	Snap-in	0.8 -1.6	Solder	4300.0701

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description

Power Supply Cord Overview complete



EU Power Supply Cord with IEC Connector C19, straight/ angled	6004.0395
US Power Supply Cord with IEC Connector C13, straight	6009.1315
US Power Supply Cord with IEC Connector C19, straight	6009.5195
JP Power Supply Cord with IEC Connector C13, straight	6047.6414

Power Supply Cord further types to 0709

Power Supply or Interconnection Cord Overview complete



Diverse Power Supply and Interconnection Cords 2.5 A	CS01.0221.150
Diverse Power Supply and Interconnection Cords 2.5 A	CS02.0221.150

Power Supply or Interconnection Cord further types to 0709