#### 6GHz, 1:4 CML FANOUT BUFFER/TRANSLATOR WITH INTERNAL I/O TERMINATION

# Precision Edge<sup>®</sup> SY58020U

#### **FEATURES**

- Precision 1:4, 400mV CML fanout buffer
- Low jitter performance:
  - 116fs<sub>RMS</sub> phase jitter (typ)
- Guaranteed AC performance over temperature/ voltage:
  - > 6GHz f<sub>MAX</sub> clock
  - < 60ps t<sub>r</sub> / t<sub>f</sub> times
  - < 250ps t<sub>pd</sub>
  - < 15ps max. skew</li>
- Accepts an input signal as low as 100mV
- Unique input termination and V<sub>T</sub> pin accepts DC-coupled and AC-coupled differential inputs: LVPECL, LVDS, and CML
- 50ohms source terminated CML outputs
- Power supply 2.5V ±5% and 3.3V ±10%
- Industrial temperature range: -40°C to +85°C
- Available in 16-pin (3mm \* 3mm) QFN package

#### **APPLICATIONS**

- All SONET and All GigE clock distribution
- Fibre Channel clock and data distribution
- Backplane distribution
- Data distribution: OC-48, OC-48+FEC, XAUI
- High-end, low skew, multiprocessor synchronous clock distribution

# Precision Edge®


#### **DESCRIPTION**

The SY58020U is a 2.5V/3.3V precision, high-speed, fully differential 1:4 CML fanout buffer. Optimized to provide four identical output copies with less than 15ps of skew and only  $116fs_{RMS}$  phase jitter, the SY58020U can process clock signals as fast as 6GHz.


The differential input includes Micrel's unique, 3-pin input termination architecture interfaces to differential LVPECL, LVDS, and CML signals (AC- or DC-coupled) as small as 100mV without any level-shifting or termination resistor networks in the signal path. For AC-coupled input interface applications, an on-board output reference voltage (V<sub>REF-AC</sub>) is provided to bias the V<sub>T</sub> pin. The outputs are optimized to drive 400mV typical swing into 500hms loads, with extremely fast rise/fall times guaranteed to be under 60ps.

The SY58020U operates from a 2.5V  $\pm 5\%$  supply or 3.3V  $\pm 10\%$  supply and is guaranteed over the full industrial temperature range ( $-40^{\circ}$ C to  $+85^{\circ}$ C). For applications that require LVPECL outputs, consider the SY58021U or SY58022U 1:4 fanout buffer with 800mV and 400mV output swing, respectively. The SY58020U is part of Micrel's high-speed, Precision Edge® product line. Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.

#### FUNCTIONAL BLOCK DIAGRAM




#### **TYPICAL PERFORMANCE**



Precision Edge is a registered trademark of Micrel, Inc.

## **PACKAGE/ORDERING INFORMATION**



16-Pin QFN (QFN-16)

# Ordering Information<sup>(1)</sup>

Part Number	Package Type	Operating Range	Package Marking
SY58020UMG	QFN-16 Pb-Free	Industrial	020U with Pb-Free bar-line indicator
SY58020UMGTR <sup>(2)</sup>	QFN-16 Pb-Free	Industrial	020U with Pb-Free bar-line indicator

#### Notes:

- 1. Contact factory for die availability. Dice are guaranteed at  $T_A$  = 25°C, DC electricals only. All devices are Pb-Free.
- 2. Tape and Reel.

### PIN DESCRIPTION

Pin Number	Pin Name	Pin Function	
1, 4	IN, /IN	Differential Input: This input pair receives the signal to be buffered. Each pin of this pair internally terminates with 50ohms to the V <sub>T</sub> pin. Note that this input will default to an indeterminate state if left open. See "Input Interface Applications" section.	
2	VT	Input Termination Center-Tap: Each input terminates to this pin. The V <sub>T</sub> pin provides a center-tap for each input (IN, /IN) to the termination network for maximum interface flexibility. See "Input Interface Applications" section.	
3	VREF-AC	Reference Output Voltage: This output biases to $V_{CC}$ –1.2V. It is used when AC-coupling to differential inputs. Connect $V_{REF-AC}$ directly to the $V_{T}$ pin. Bypass with 0.01 $\mu$ F low ESR capacitor to $V_{CC}$ . See "Input Interface Applications" section.	
8, 13	VCC	Positive Power Supply: Bypass with 0.1μF//0.01μF low ESR capacitors as close to the pins as possible.	
5, 16	GND, Exposed Pad	Ground. Exposed pad must be connected to a ground plane that is the same potential as the ground pin.	
14, 15 11, 12 9, 10 6, 7	/Q0, Q0, /Q1, Q1, /Q2, Q2, /Q3, Q3,	CML Differential Output Pairs: Differential buffered output copy of the input signal. The output swing is typically 400mV into 50ohms load. Normally terminate CML output pairs with 100ohms across Q and /Q outputs at the receiving end. Unused output pairs may be left floating with no impact on jitter or skew. See "CML Output Termination" section.	

# Absolute Maximum Ratings(Note 1)

# Operating Ratings(Note 2)

Supply Voltage (V <sub>CC</sub> )	+2.375V to +3.60V
Operating Temperature Range (T <sub>A</sub> )	–40°C to +85°C
Package Thermal Resistance	
QFN $(\theta_{JA})$	
Still-Air	60°C/W
500lfpm	54°C/W
QFN (Ψ <sub>JB</sub> )	
(Junction-to-Board Resistance), N	Note 3 33°C/W

#### DC ELECTRICAL CHARACTERISTICS(Notes 5)

 $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ 

Symbol	Parameter	Condition	Min	Тур	Max	Units
V <sub>CC</sub>	Power Supply Voltage	V <sub>CC</sub> = 2.5V V <sub>CC</sub> = 3.3V	2.375 3.0	2.5 3.3	2.625 3.60	V V
I <sub>CC</sub>	Power Supply Current	No load, V <sub>CC</sub> = max. (includes internal 50ohms pull-up)		150	180	mA
$V_{IH}$	Input HIGH Voltage	Note 6	V <sub>CC</sub> -1.6		V <sub>CC</sub>	V
$V_{IL}$	Input LOW Voltage		0		V <sub>IH</sub> -0.1	V
V <sub>IN</sub>	Input Voltage Swing	See Figure 1a	0.1		1.7	V
V <sub>DIFF_IN</sub>	Differential Input Voltage Swing	See Figure 1b	0.2		3.4	V
R <sub>IN</sub>	IN-to-V <sub>T</sub> Resistance		40	50	60	ohms
V <sub>REF-AC</sub>	Output Reference Voltage		V <sub>CC</sub> -1.3	V <sub>CC</sub> –1.2	V <sub>CC</sub> –1.1	V
V <sub>T IN</sub>	IN-to-V <sub>T</sub> Voltage				1.28	V

## CML DC ELECTRICAL CHARACTERISTICS(Notes5)

 $V_{CC}$  = 3.3V ±10% or 2.5V ±5%;  $R_{I}$  = 100ý across each output pair or equivalent;  $T_{A}$  = -40°C to +85°C, unless otherwise stated.

Symbol	Parameter	Condition	Min	Тур	Max	Units
V <sub>OH</sub>	Output HIGH Voltage		V <sub>CC</sub> -0.020	V <sub>CC</sub> -0.010	V <sub>CC</sub>	V
V <sub>OUT</sub>	Output Voltage Swing	see Figure 1a	325	400	500	mV
V <sub>DIFF_OUT</sub>	Differential Output Voltage Swing	see Figure 1b	650	800	1000	mV
R <sub>OUT</sub>	Output Source Impedance		40	50	60	ohms

- Note 1. Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATINGS conditions for extended periods may affect device reliability.
- Note 2. The data sheet limits are not guaranteed if the device is operated beyond the operating ratings.
- Note 3. Thermal performance assumes exposed pad is soldered (or equivalent) to the device's most negative potential on the PCB.
- Note 4. Due to the limited drive capability, use for input of the same package only.
- Note 5. The circuit is designed to meet the DC specifications shown in the above table after thermal equilibrium has been established.
- **Note 6.** V<sub>IH</sub> (min.) not lower than 1.2V.

## **AC ELECTIRCAL CHARACTERISTICS**


 $V_{CC}$  = 2.5V ±5% or 3.3V ±10%;  $T_A$  = -40°C to +85°C;  $R_L$  = 100ohms across each output pair or equivalent, unless otherwise stated.

Symbol	Parameter	Condition	Min	Тур	Max	Units
$f_{MAX}$	Maximum Operating Frequency	V <sub>OUT</sub> • 200mV Cloc	6			GHz
		NRZ Data	а	10		Gbps
$t_{pd}$	Propagation Delay		110	180	260	ps
t <sub>CHAN</sub>	Channel-to-Channel Skew	Note 7		4	15	ps
t <sub>SKEW</sub>	Part-to-Part Skew	Note 8			50	ps
t <sub>JITTER</sub>	RMS Phase Jitter	Output = 622MHz Integration Range: 12kHz - 20MHz		116		fs(rms)
$t_r$ , $t_f$	Output Rise/Fall Time 20% to 80%	At full swing	20	40	60	ps

Note 7. Skew is measured between outputs of the same bank under identical transitions.


Note 8. Skew is defined for two parts with identical power supply voltages at the same temperature and with no skew of the edges at the respective inputs.

#### **PHASE NOISE**

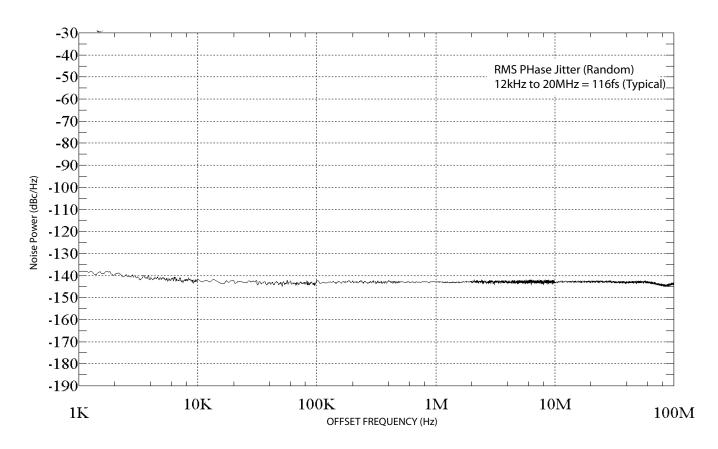

Phase Noise Plot: 622MHz@3.3V

## **TIMING DIAGRAM**

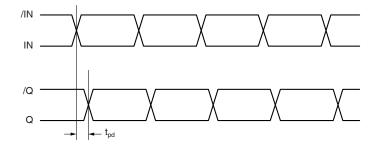

## **SINGLE-ENDED AND DIFFERENTIAL SWINGS**



Figure 1a. Single-Ended Voltage Swing







Figure 1b. Differential Voltage Swing


### TYPICAL OPERATING CHARACTERISTICS

 $V_{CC}$  = 2.5V, GND = 0,  $V_{IN}$  = 100mV,  $T_A$  = 25°C, unless otherwise stated.











## **FUNCTIONAL CHARACTERISTICS**

 $V_{CC}$  = 2.5V, GND = 0,  $V_{IN}$  = 100mV,  $T_A$  = 25°C, unless otherwise stated.





### **INPUT STAGE**




Figure 2. Simplified Differential Input Buffer

## **INPUT INTERFACE APPLICATIONS**




Figure 3a. DC-Coupled CML Input Interface




Figure 3b. AC-Coupled CML Input Interface




Figure 3c. LVDS Input Interface




Figure 3d. LVPECL Input Interface




Figure 3e. AC-Coupled LVPECL Input Interface

## **CML OUTPUT TERMINATION**

Figures 4 and 5 illustrate how to terminate a CML output using both the AC-coupled and DC-coupled configuration.

All outputs of the SY58020U are 50ý with a 16mA current source.




Figure 4. CML DC-Coupled





Figure 5. CML AC-Coupled Termination

#### RELATED MICREL PRODUCTS AND SUPPORT DOCUMENTATION

Part Number	Function	Data Sheet Link
SY58020U	6GHz, 1:4 CML Fanout Buffer/Translator with Internal I/O Termination	http://www.micrel.com/product-info/products/sy58020u.shtml
SY58021U	4GHz, 1:4 LVPECL Fanout Buffer/Translator with Internal Termination	http://www.micrel.com/product-info/products/sy58021u.shtml
SY58022U	5.5GHz, 1:4 Fanout Buffer/Translator w/400mV LVPECL Outputs and Internal Input Termination	http://www.micrel.com/product-info/products/sy58022u.shtml
	16-MLF™ Manufacturing Guidelines Exposed Pad Application Note	www.amkor.com/products/notes_papers/MLF_AppNote_0902.pdf
M-0317	HBW Solutions	http://www.micrel.com/product-info/as/solutions.shtml

#### 16 LEAD *QFN* (QFN-16)

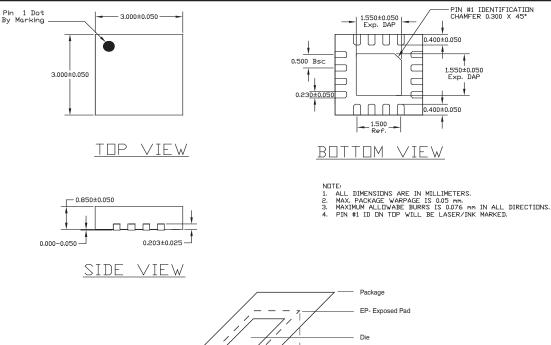

EP- Exposed Pad

Die

CompSide Island

Heat Dissipation

Heavy Copper Plane

Vee

Heavy Copper Plane

Vee

PCB Thermal Consideration for 16-Pin QFN Package (Always solder, or equivalent, the exposed pad to the PCB)

#### Package Notes:

Note 1. Package meets Level 2 qualification.

Note 2. All parts are dry-packaged before shipment.

Note 3. Exposed pads must be soldered to a ground for proper thermal management.

#### MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http://www.micrel.com

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.